

QSHF6010-3216 高通滤波器


Highpass Filter

●电气性能

Electrical properties

NO.	Item (项目)	Specification (特性)
1	Passband 通带	6300-15000 MHz
2	Insertion Loss 插入损耗	$\leq 5.0\text{dB}$ (at $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$)
		$\leq 5.5\text{dB}$ (at $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$)
3	V. S. W. R (in BW) 驻波比	< 2.5 (6050-8000 MHz)
4	Attenuation 阻带抑制	$\geq 20\text{dB}$ (at 5200 MHz)
		$\geq 25\text{dB}$ (at 5190 MHz)
5	Permissible Input Power 输入功率 (MAX)	3 W
6	In/Output Impedance 输入/输出阻抗	50 Ω

Character 特性曲线

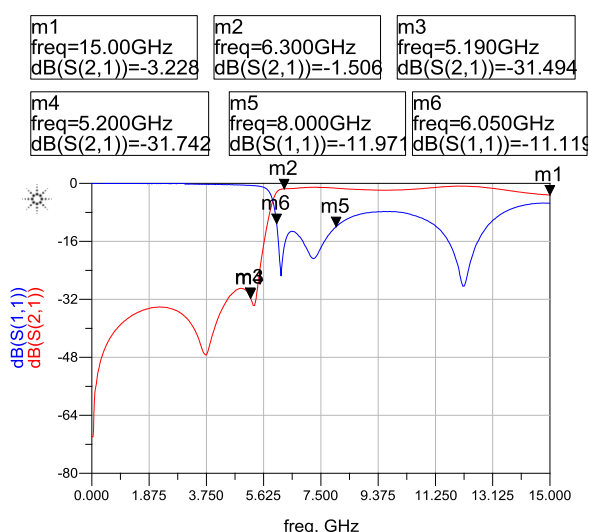

Dimensions 外型尺寸

