



一、产品电气特性

PARAMETER	SPECIFICATIONS						
Operating TEM.	-40°C TO +85°C						
Storage TEM.	-45°C TO +105°C						
Lk	0.50uH Max @100KHz, 0.1V						
Cw/w	120PF TYP @100KHz, 0.1V						
DCR	1.4Ω Max						
OCL	350uH Min@100KHz 100mV 8mA						
URNS RATIO	1:1 ±2%						
POLARITY	PER SCHEMATIC						
INSERTION LOSS	1-100MHz						
	-1.1dB MAX						
RETURN LOSS (Z OUT=100)	1MHz	5MHz	10MHz	40MHz	60MHz	80MHz	100MHz
	<-16dB	<-16dB	<-16dB	<-16dB	<-12.5dB	<-10dB	<-8.1dB
CMRR	1-100MHz						
	-30dB Min						
Crosstalk	1-100MHz						
	-30dB Min						
Hi-Pot	1500VRMS 60SEC						


二、产品原理图

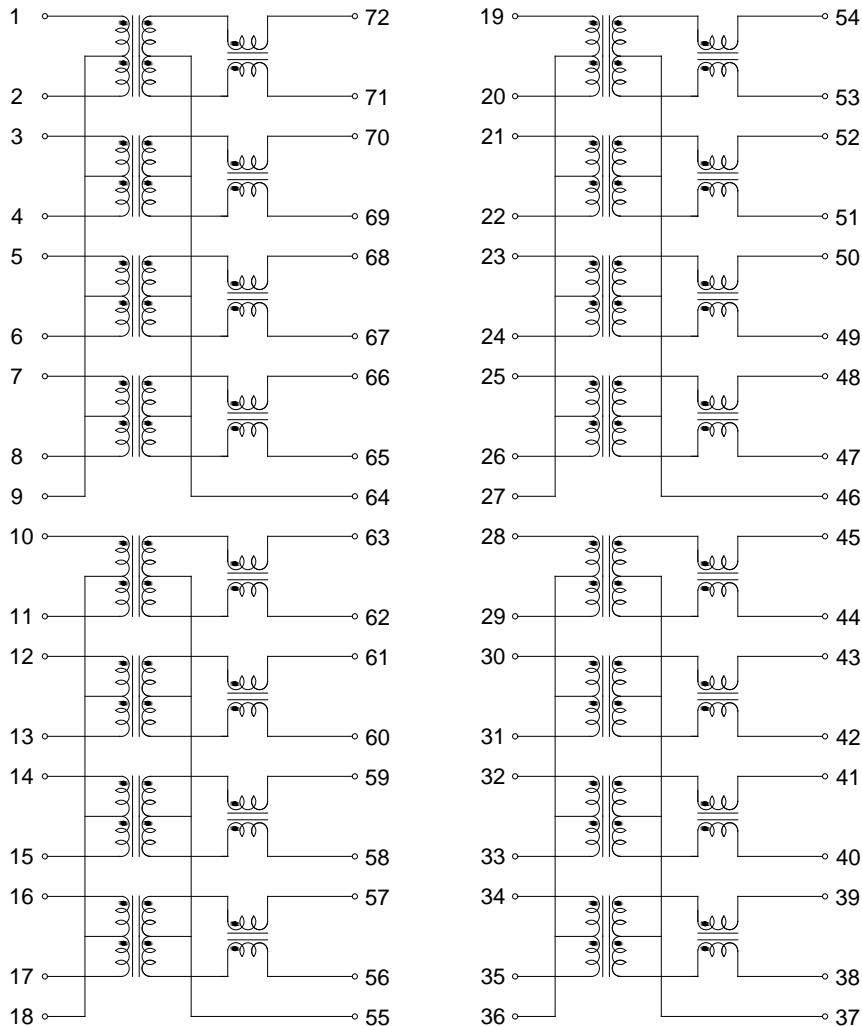

三、产品尺寸图

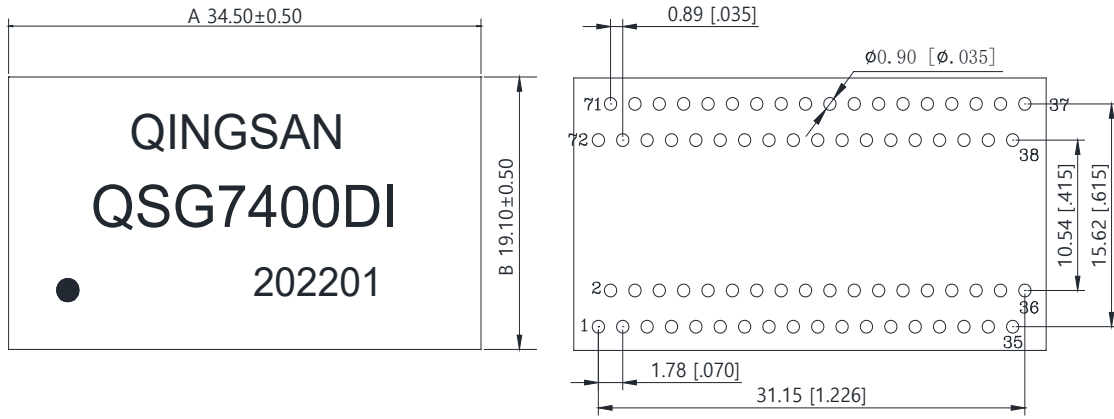

TOP VIEW SUGGESTED
PCB LAYOUT

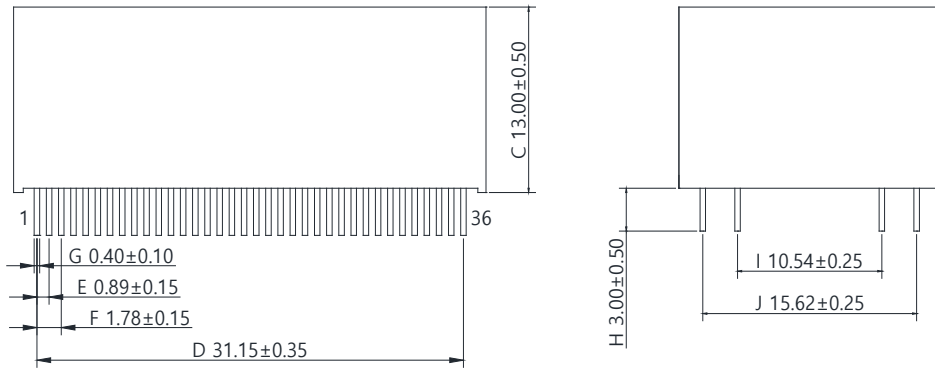

Remarks: Unit:mm[inch]

Unless otherwise specified, all tolerances are $\pm 0.254[0.01]$